


- LG49-FE0BG Finish(BG) ☐
- LG49-FE0C Finish(C) ☐
- LG49-FE0D Finish(D) ☐
- LG49-FE0K Finish(K) ☐
- LG49-FE0Y Finish(Y) ☐



Specifications

- Pforever Seal

Features

- 1.2 GPM Flow Rate
- Quick Connect Installation
- Metal Pop-Up Drain
- Fixed Hubs
- PVD Finish (K Finish Only)
- Pforever Seal Ceramic Disc Valves
- Pforever Warranty®


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- CEC Compliant
- EPA WaterSense Certification 1.2 gpm, 4.5 L/Min
- ADA Compliant-ANSI A117.1 (Lever handles only)



Dimensions

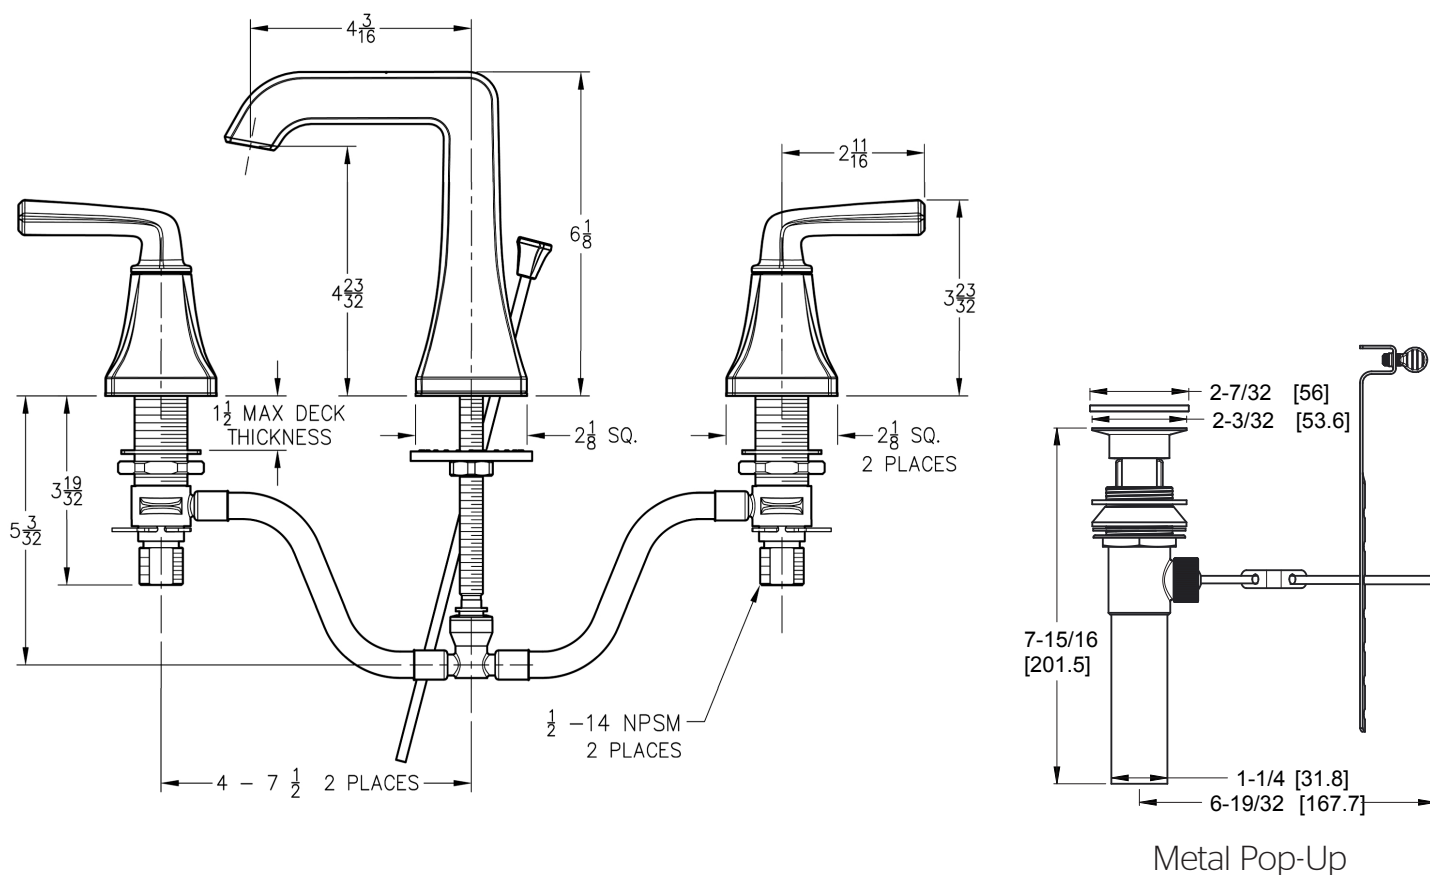

Ø1-1/4 Min to Ø1-1/2 Max. Deck Hole Openings