

DI GROOVED FITTINGS-GROOVED CONCENTRIC REDUCER

Type: 240

Doc No: DS-400-240-01-E

1.0 PRODUCT OVERVIEW

Grooved concentric reducer is used for groove pipeline connection. It is mainly applied in the pipeline diameter change. The center of the two ends of the connection is in the same straight line, which can change the flow rate.



Dimensions:

1 1/4"(DN32)– 12"(DN300)

Design Standard:

ISO6182, AWWA C606, GB 5135.11

Connection Standard:

ASME B36.10, ASTM A53-A53M, ISO 4200

Working Pressure:

175PSI-500PSI

Application:

The grooved concentric reducer product is suitable for medium and low pressure pipeline systems with nominal pressure 175-500 PSI, nominal size DN32-DN300, temperature range of - 20 °C-+180°C, which are widely applied in water supply and drainage, fire-fighting, air conditioning, etc.

Pipe Material:

Welded and seamless rolled steel pipes according to ASME B36.10, ASTM A53-A53M, ISO 4200, GB/T 21835

Surface Treatment:

Sign Off:

Owner: _____ Contractor: _____

Engineer: _____

Location: _____ Date: _____

Approved & Date: _____

- Electrophoretic painting
- Epoxy power painting
- Hot-dip galvanizing
- Black
- Others would be available upon clients' detailed request


2.0 APPROVALS



3.0 SPECIFICATIONS-MATERIAL

Ductile iron according to ASTM A536, grade 65-45-12. The nodularity is more than 90%, ensuring excellent physical and mechanical properties.

4.0 DIMENSIONS AND PERFORMANCE

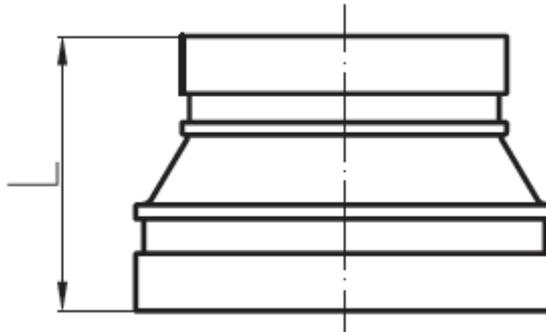

Sign Off:

Owner: _____ Contractor: _____
Location: _____ Date: _____

Engineer: _____
Approved & Date: _____

Nominal	Pipe	Working Pressure	Dimensions
Size	O.D.		L
mm/in	mm/in	PSI/MPa	mm/in
32X25	42.4X33.7	500	64
1 ¹ / ₄ X1	1.660X1.315	3.45	2.5
40X25	48.3X33.7	500	64
1 ¹ / ₂ X1	1.900X1.315	3.45	2.5
40X32	48.3X42.4	500	64
1 ¹ / ₂ X1 ¹ / ₄	1.900X1.660	3.45	2.5
50X25	60.3X33.7	500	64
2X1	2.375X1.315	3.45	2.5
50X32	60.3X42.4	500	64
2X1 ¹ / ₄	2.375X1.660	3.45	2.5
50X40	60.3X48.3	500	64
2X1 ¹ / ₂	2.375X1.900	3.45	2.5
65X25	73.0X33.7	500	64
2 ¹ / ₂ X1	2.875X1.315	3.45	2.5
65X32	73.0X42.4	500	64
2 ¹ / ₂ X1 ¹ / ₄	2.875X1.660	3.45	2.5
65X40	73.0X48.3	500	64
2 ¹ / ₂ X1 ¹ / ₂	2.875X1.900	3.45	2.5
65X50	73.0X60.3	500	64
2 ¹ / ₂ X2	2.875X2.375	3.45	2.5
65X25	76.1 X33.7	500	64
2 ¹ / ₂ X1	3.000X1.315	3.45	2.5
65X32	76.1X42.4	500	64
2 ¹ / ₂ X1 ¹ / ₄	3.000X1.660	3.45	2.5
65X40	76.1X48.3	500	64
2 ¹ / ₂ X1 ¹ / ₂	3.000X1.900	3.45	2.5
65X50	76.1X60.3	500	64
2 ¹ / ₂ X2	3.000X2.375	3.45	2.5
80X25	88.9X33.7	500	64
3X1	3.500X1.315	3.45	2.5
80X32	88.9X42.4	500	64
3X1 ¹ / ₄	3.500X1.660	3.45	2.5
80X40	88.9X48.3	500	64
3X1 ¹ / ₂	3.500X1.900	3.45	2.5
80X50	88.9X60.3	500	64
3X2	3.500X2.375	3.45	2.5
80X65	88.9X73.0	500	64
3X2 ¹ / ₂	3.500X2.875	3.45	2.5

Sign Off:

Owner: _____ Contractor: _____

Engineer: _____

Location: _____ Date: _____

Approved & Date: _____

Nominal	Pipe	Working Pressure	Dimensions
Size	O.D.		L
mm/in	mm/in	PSI/MPa	mm/in
80X65	88.9X76.1	500	64
3X2½	3.500X3.000	3.45	2.5
100X50	108.0X60.3	500	76
4X2	4.250X2.375	3.45	3
100X65	108.0X73.0	500	76
4X2½	4.250X2.875	3.45	3
100X65	108.0X76.1	500	76
4X2½	4.250X3.000	3.45	3
100X80	108.0X88.9	500	76
4X3	4.250X3.500	3.45	3
100X32	114.3X42.4	500	76
4X1¼	4.500X1.660	3.45	3
100X40	114.3X48.3	500	76
4X1½	4.500X1.900	3.45	3
100X50	114.3X60.3	500	76
4X2	4.500X2.375	3.45	3
100X65	114.3X73.0	500	76
4X2½	4.500X2.875	3.45	3
100X65	114.3X76.1	500	76
4X2½	4.500X3.000	3.45	3
100X80	114.3X88.9	500	76
4X3	4.500X3.500	3.45	3
125X100	133.0X108.0	500	89
5X4	5.250X4.250	3.45	3.5
125X100	133.0X114.3	500	89
15X4	5.250X4.500	3.45	3.5
125X50	139.7X60.3	500	89
5X2	5.500X2.375	3.45	3.5
125X65	139.7X76.1	500	89
5X2½	5.500X3.000	3.45	3.5
125X80	139.7X88.9	500	89
5X3	5.500X3.500	3.45	3.5
125X100	139.7X114.3	500	89
5X4	5.500X4.500	3.45	3.5
125X65	141.3X73.0	500	89
5X2½	5.563X2.875	3.45	3.5

Sign Off:

Owner: _____ Contractor: _____

Engineer: _____

Location: _____ Date: _____

Approved & Date: _____

Nominal	Pipe	Working Pressure	Dimensions
Size	O.D.		L
mm/in	mm/in	PSI/MPa	mm/in
125X80	141.3X88.9	500	89
5X3	5.563X3.500	3.45	3.5
125X100	141.3X114.3	500	89
5X4	5.563X4.500	3.45	3.5
150X50	159.0X60.3	500	102
6X2	6.250X2.375	3.45	4
150X65	159.0X76.1	500	102
159.0X2½	6.250X3.000	3.45	4
150X80	159.0X88.9	500	102
6X3	6.250X3.500	3.45	4
150X100	159.0X108	500	102
6X4	6.250X4.250	3.45	4
150X100	159.0X114.3	500	102
6X4	6.250X4.500	3.45	4
150X125	159.0X133.0	500	102
6X5	6.250X5.250	3.45	4
150X50	165.1X60.3	500	102
6X2	6.500X2.375	3.45	4
150X65	165.1X76.1	500	102
6X2½	6.500X3.000	3.45	4
150X80	165.1X88.9	500	102
6X3	6.500X3.500	3.45	4
150X100	165.1X108.0	500	102
6X4	6.500X4.250	3.45	4
150X100	165.1X114.3	500	102
6X4	6.500X4.500	3.45	4
150X125	165.1X139.7	500	102
6X5	6.500X5.500	3.45	4
150X125	165.1X141.3	500	102
6X5	6.500X5.563	3.45	4
150X50	168.3X60.3	500	102
6X2	6.625X2.375	3.45	4
150X65	168.3X73.0	500	102
6X2½	6.625X2.875	3.45	4
150X65	168.3X76.1	500	102
6X2½	6.625X3.000	3.45	4

Sign Off:

Owner: _____ Contractor: _____

Engineer: _____

Location: _____ Date: _____

Approved & Date: _____

Nominal	Pipe	Working Pressure	Dimensions
Size	O.D.		L
mm/in	mm/in	PSI/MPa	mm/in
150X80 6X3	168.3X88.9 6.625X3.500	500 3.45	102 4
150X100 6X4	168.3X114.3 6.625X4.500	500 3.45	102 4
150X125 6X5	168.3X139.7 6.625X5.500	500 3.45	102 4
150X125 6X5	168.3X141.3 6.625X5.563	500 3.45	102 4
200X100 8X4	216.3X114.3 8.516X4.500	300 2.07	127 5
200X150 8X6	216.3X165.1 8.516X6.500	300 2.07	127 5
200X65 8X2½	219.1X73.0 8.625X2.875	500 3.45	127 5
200X80 8X3	219.1X88.9 8.625X3.500	500 3.45	127 5
200X100 8X4	219.1X108.0 8.625X4.250	300 2.07	127 5
200X100 8X4	219.1X114.3 8.625X4.500	500 3.45	127 5
200X125 8X5	219.1X139.7 8.625X5.500	300 2.07	127 5
200X125 8X5	219.1X141.3 8.625X5.563	500 3.45	127 5
200X150 8X6	219.1X159.0 8.625X6.250	300 2.07	127 5
200X150 8X6	219.1X165.1 8.625X6.500	300 2.07	127 5
200X150 8X6	219.1X168.3 8.625X6.625	500 3.45	127 5
250X150 10X6	273.0X159.0 10.750X6.250	300 2.07	152 6
250X150 10X6	273.0X165.1 10.750X6.500	300 2.075	152 6
250X150 10X6	273.0X168.3 10.750X6.625	300 2.07	152 6

Sign Off:

Owner: _____ Contractor: _____

Engineer: _____

Location: _____ Date: _____

Approved & Date: _____

Nominal	Pipe	Working Pressure	Dimensions
Size	O.D.		L
mm/in	mm/in	PSI/MPa	mm/in
250X200	273.0X219.1	300	152
10X8	10.750X8.625	2.07	6
300X200	323.9X219.1	300	178
12X8	12.750X8.625	2.07	7
300X250	323.9X273.0	300	178
12X10	12.750X10.750	2.07	7

5.0 REFERENCE MATERIALS

Approved certification for Grooved Fittings and Couplings

I-JM-Grooved fitting: Installation Instructions for grooved fittings and couplings

Sign Off:

Owner: _____ Contractor: _____

Engineer: _____

Location: _____ Date: _____

Approved & Date: _____