MOEN®

Specifications



DESCRIPTION
- Showerhead is plastic construction while other elements are of metal construction
  Includes valve, showerhead, arm, and flange for model 2773
  4 port valve body connectors are 1/2"
  Hot and cold indicator icons are etched into escutcheon

OPERATION
- Lever style handle
  Pull open, push lever to close valve
  Temperature controlled through 1100 arc of handle travel

FLOW
- Showerhead is limited to 2.0 gpm (7.6 L/min) MAX.

CARTRIDGE
- 35mm ceramic disk cartridge
  Nonmetallic/nonferrous and stainless steel materials

STANDARDS
- Designed to meet GB standards
  ADA for lever handle

WARRANTY
- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
  5 year limited warranty when used in a commercial installation
  Visit www.moen.com/support for complete details and limitations

Arlys™

ARLYS™ 1H NON PB W SHOWER

MODELS: 2773 Series - Non P.B. SHOWER
2775 Series - Non P.B. SHOWER TRIM & VALVE

ADA





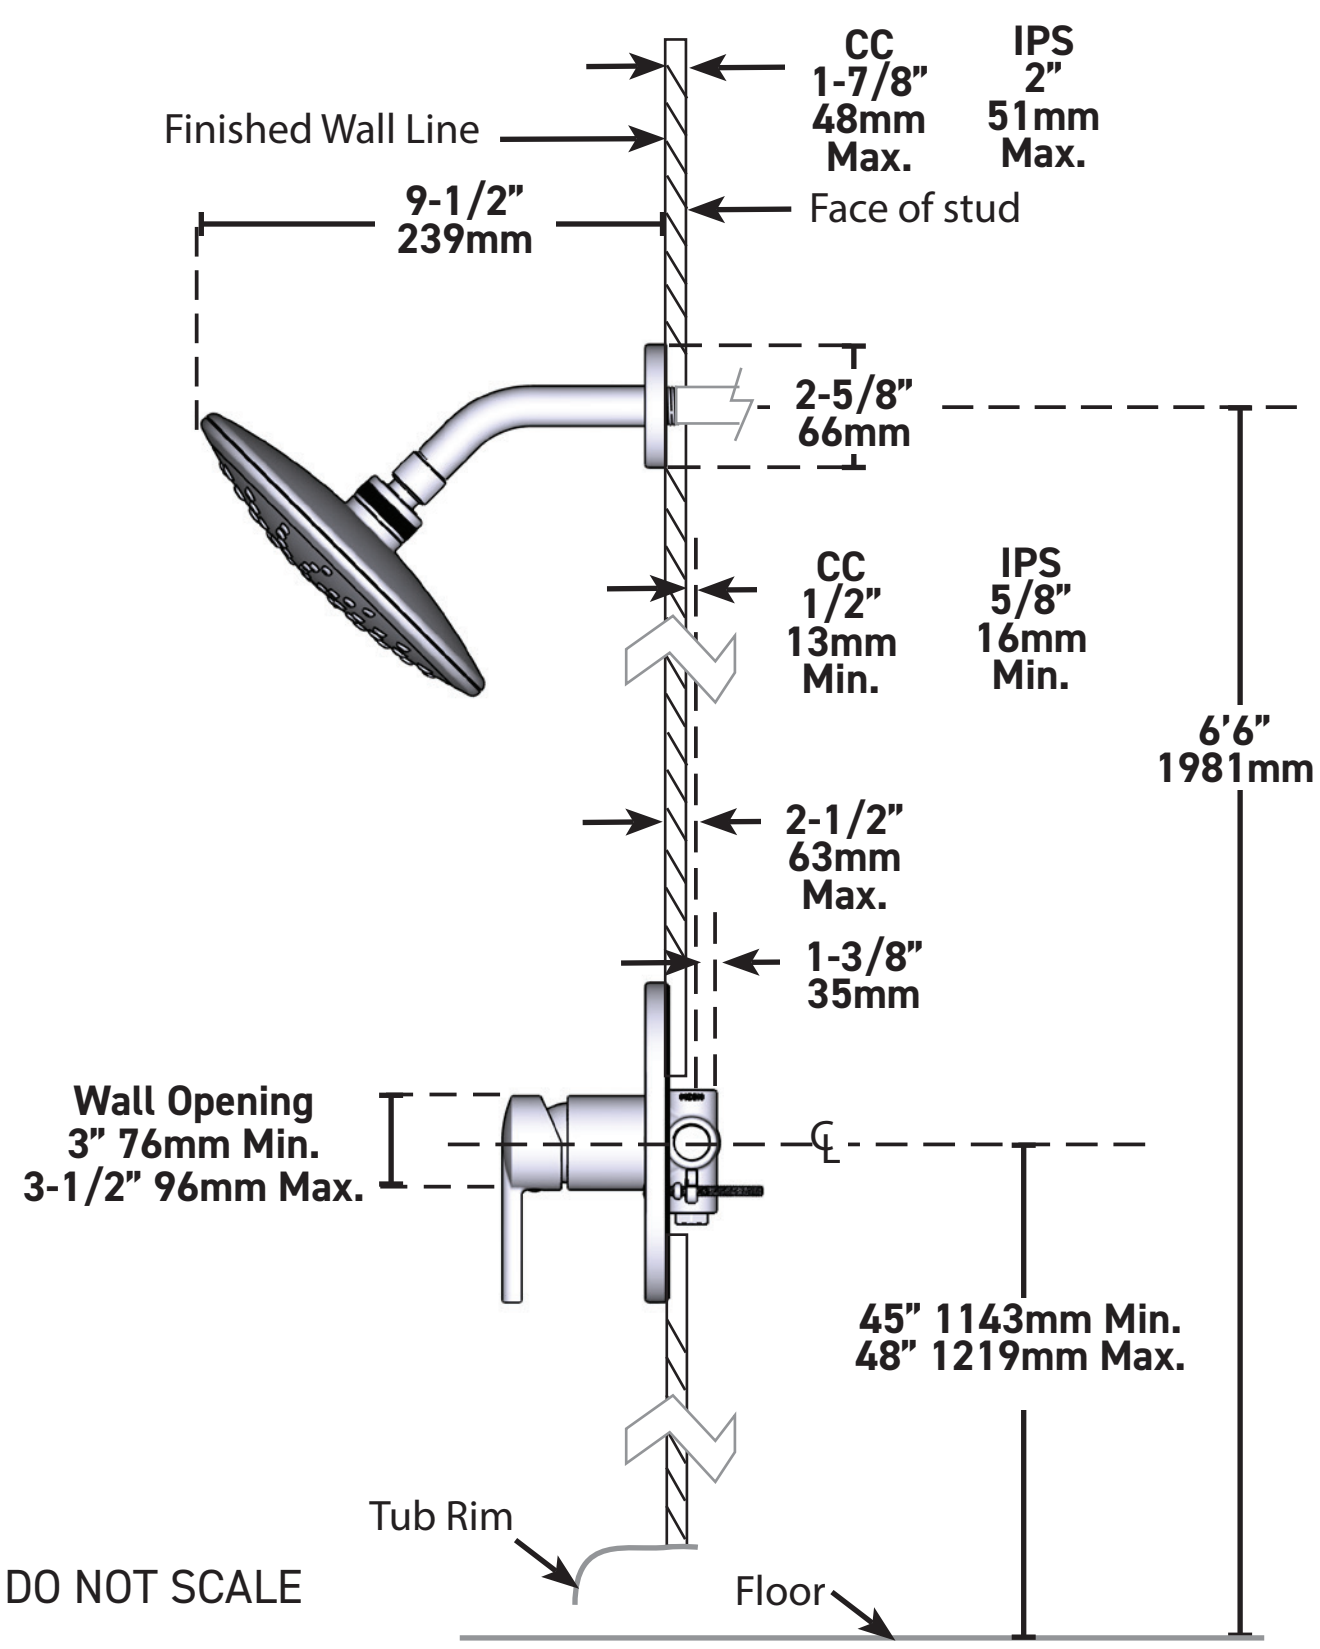

CRITICAL DIMENSIONS DO NOT SCALE